



THE UNIVERSITY *of* EDINBURGH

Edinburgh Research Explorer

## Modeling spike-count dependence structures with multivariate Poisson distributions

**Citation for published version:**

Onken, A & Obermayer, K 2008, 'Modeling spike-count dependence structures with multivariate Poisson distributions', Seventeenth Annual Computational Neuroscience Meeting: CNS\*2008, 19/07/08 - 24/07/08 pp. 1-2. <https://doi.org/10.1186/1471-2202-9-S1-P127>

**Digital Object Identifier (DOI):**

[10.1186/1471-2202-9-S1-P127](https://doi.org/10.1186/1471-2202-9-S1-P127)

**Link:**

[Link to publication record in Edinburgh Research Explorer](#)

**Document Version:**

Publisher's PDF, also known as Version of record

**General rights**

Copyright for the publications made accessible via the Edinburgh Research Explorer is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

**Take down policy**

The University of Edinburgh has made every reasonable effort to ensure that Edinburgh Research Explorer content complies with UK legislation. If you believe that the public display of this file breaches copyright please contact [openaccess@ed.ac.uk](mailto:openaccess@ed.ac.uk) providing details, and we will remove access to the work immediately and investigate your claim.



Poster presentation

Open Access

## Modeling spike-count dependence structures with multivariate Poisson distributions

Arno Onken\*<sup>1,2</sup> and Klaus Obermayer<sup>1,2</sup>

Address: <sup>1</sup>Bernstein Center for Computational Neuroscience, Berlin, 10115, Germany and <sup>2</sup>Department of Electrical Engineering and Computer Science, Berlin Institute of Technology, Berlin, 10587, Germany

Email: Arno Onken\* - aonken@cs.tu-berlin.de

\* Corresponding author

from Seventeenth Annual Computational Neuroscience Meeting: CNS\*2008  
Portland, OR, USA. 19–24 July 2008

Published: 11 July 2008

BMC Neuroscience 2008, **9**(Suppl 1):P127 doi:10.1186/1471-2202-9-S1-P127

This abstract is available from: <http://www.biomedcentral.com/1471-2202/9/S1/P127>


© 2008 Onken and Obermayer; licensee BioMed Central Ltd.

Previous studies use multivariate Gaussian distributions as models of correlated spike-counts [1]. However, this approximation is not appropriate for short time intervals and fails to model realistic dependence structures. To eradicate these shortcomings, we propose alternative joint distributions that are marginally Poisson distributed and contain a broad range of dependence structures for count variables.

We apply two methods to generate multivariate Poisson distributions of dependent spike-counts. The first approach employs sums of hidden variables to introduce

dependencies between the Poisson distributed counts [2]. The second approach introduces dependencies by means of copulas of several classes. Copulas are functions that couple marginal cumulative distribution functions to form a joint distribution function with the same margins [3].

The methods are evaluated on a data set of simultaneously measured spike-counts on 100 ms intervals of up to three neurons in macaque MT responding to stochastic dot stimuli [4]. Parameters are estimated by the inference-for margins method: first the margin likelihoods are sepa-

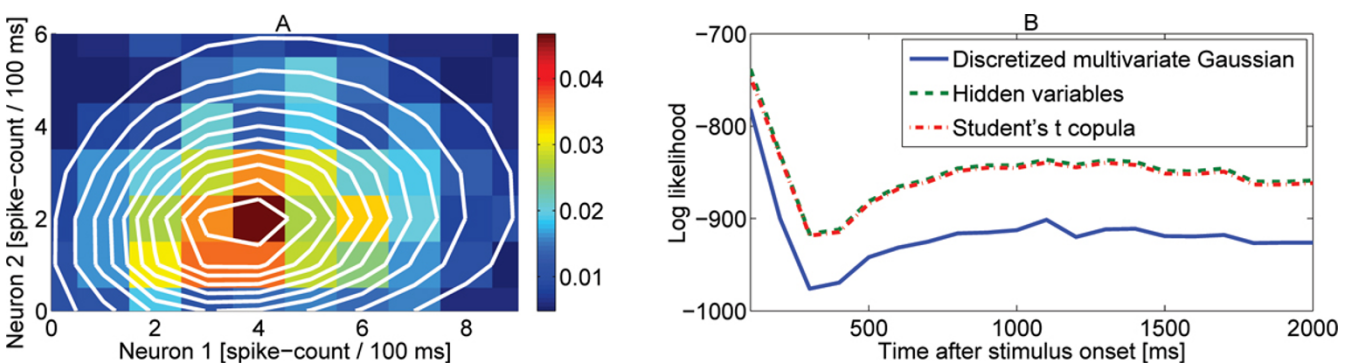

**Figure 1**

Likelihoods of the distribution fits to data from [4]. **A.** Empirical fractions of measured spike-counts for a representative neuron pair and white contour lines of the bivariate Poisson distribution with hidden variables. **B.** Log likelihoods for the discretized Gaussian, the multivariate Poisson distribution with hidden variables, and the best fitting copula at consecutive 100 ms time intervals after stimulus onset.

rately maximized and then the coupling parameters are estimated given the parameterized margins. Resulting parameters are close to the maximum likelihood estimation with the advantage that the approach is also tractable for high dimensions. Goodness-of-fit is evaluated by cross-validation for the likelihoods. We find that a multivariate Poisson distribution with hidden variables provides the best overall fit to the data from [4] (see Figure 1).

## Acknowledgements

This work was supported by BMBF grant 01GQ0410.

## References

1. Abbott LF, Dayan P: **The effect of correlated variability on the accuracy of a population code.** *Neural Computation* 1999, **11**:91-101.
2. Kawamura K: **The structure of the multivariate Poisson distribution.** *Kodai Mathematical Journal* 1979, **2**:337-345.
3. Nelsen RB: *An Introduction to Copulas* New York: Springer-Verlag; 1998.
4. Zohary E, Newsome WT: **Responses of pairs of neurons in macaque MT/V5 as a function of motion coherence in stochastic dot stimuli.** *Neural Signal Archive, nsa2004.2* [<http://www.neuralsignal.org>].

Publish with **BioMed Central** and every scientist can read your work free of charge

*"BioMed Central will be the most significant development for disseminating the results of biomedical research in our lifetime."*

Sir Paul Nurse, Cancer Research UK

Your research papers will be:

- available free of charge to the entire biomedical community
- peer reviewed and published immediately upon acceptance
- cited in PubMed and archived on PubMed Central
- yours — you keep the copyright

Submit your manuscript here:  
[http://www.biomedcentral.com/info/publishing\\_adv.asp](http://www.biomedcentral.com/info/publishing_adv.asp)

